




Installation and mounting manual for EK-FB KIT EVGA X79 CLASSIFIED water block:


This product is intended for installation only by expert users. Please consult with a qualified technician for installation. Improper installation may result in damage to your equipment. EK Water Blocks assumes no liability whatsoever, expressed or implied, for the use of these products, nor their installation. The following instructions are subject to change without notice. Please visit our web site at www.ekwaterblocks.com for updates. Before installation of this product please read important notice, disclosure and warranty conditions printed on the back of the box or our home page. **The barb hose fittings require only a small amount of force to screw them in; otherwise the high flow fittings might break. These fittings do not need to be tightened with much force because the liquid seal is made using o-rings. The use of corrosion inhibitors is always recommended for any liquid cooling system.**

STEP 1: GENERAL INFORMATION Sample photo of EVGA X79 CLASSIFIED motherboard

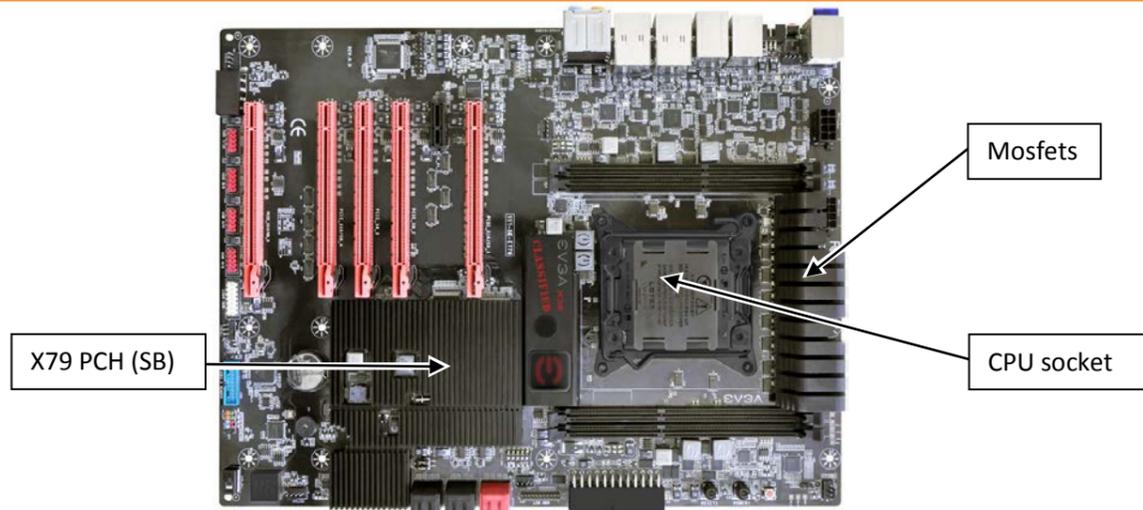


STEP 2: PREPARING YOUR MOTHERBOARD


1. REMOVING STOCK COOLER. Remove all encircled screws. There are 8 screws on the back of the motherboard that needs to be removed in order to remove both SB (X79 PCH) as well as MOSFET factory cooling solution.

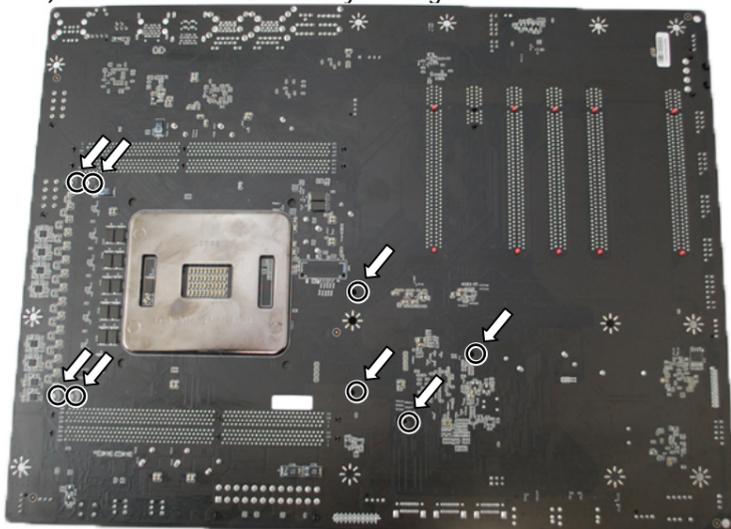


2. CLEANING THE PCB. Carefully detach the original stock cooler after removing all screws securing it to the board. Wipe off the remains (by using non-abrasive cloth or *qtip*, as shown on sample photo) of the original thermal compound until the components and circuit board are completely clean. EKWB recommends the use of denatured alcohol for removing TIM leftovers.

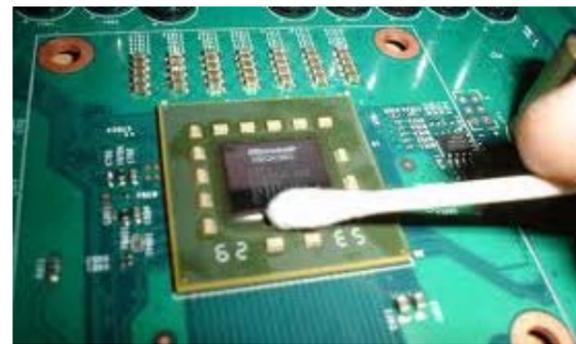


3. APPLYING THERMAL COMPOUND. Apply thermal compound: lightly coat the *Intel X79 PCH (SB)* with electrically non-conductive thermal grease - for example Arctic Cooling MX-2™, MX-4™ or GELID GC-Extreme™ thermal grease. EKWB recommends to apply thermal grease in cross form for best performance (see sample picture).

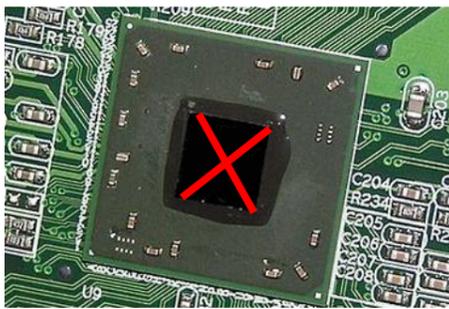

4. CUTTING THERMAL PADS. Your block comes with thermal pads, some of which are already pre-cut. Others have to be cut to smaller chunks in order to cover all the VRM components such as MOSFETs and drivers. PLEASE REMOVE THE PROTECTIVE FOIL FROM BOTH SIDES OF THE THERMAL PADS PRIOR TO INSTALLATION. Replacement thermal pads: Thermal Pad A - 0.5mm (100x16mm), Thermal Pad A - 1mm (100x16mm).

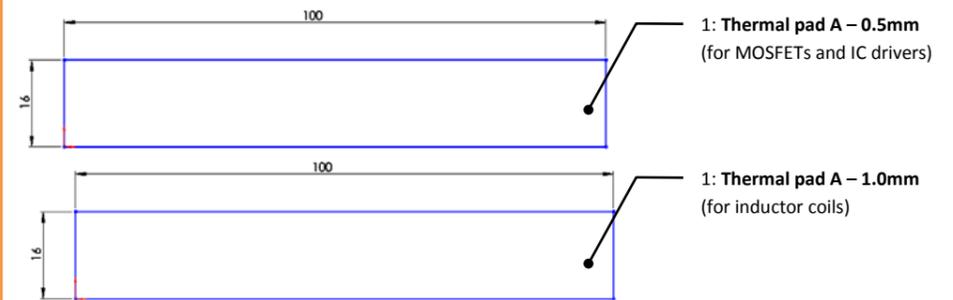


5. PLACING THERMAL PADS ON MOTHERBOARD. Place thermal pads you cut on PCB as shown on picture below (PLEASE REMOVE THE PROTECTIVE FOIL FROM BOTH SIDES OF THE THERMAL PADS PRIOR TO INSTALLATION). EK recommends using small drops of electrically non-conductive (for example: Arctic Cooling MX-2™, MX-4™ or GELID GC-Extreme™) thermal grease on each phase regulator (that is being covered with thermal pad; see picture below) in order to even further improve the thermal performance of the EK-FB KIT EVGA X79 CLASSIFIED series water block.

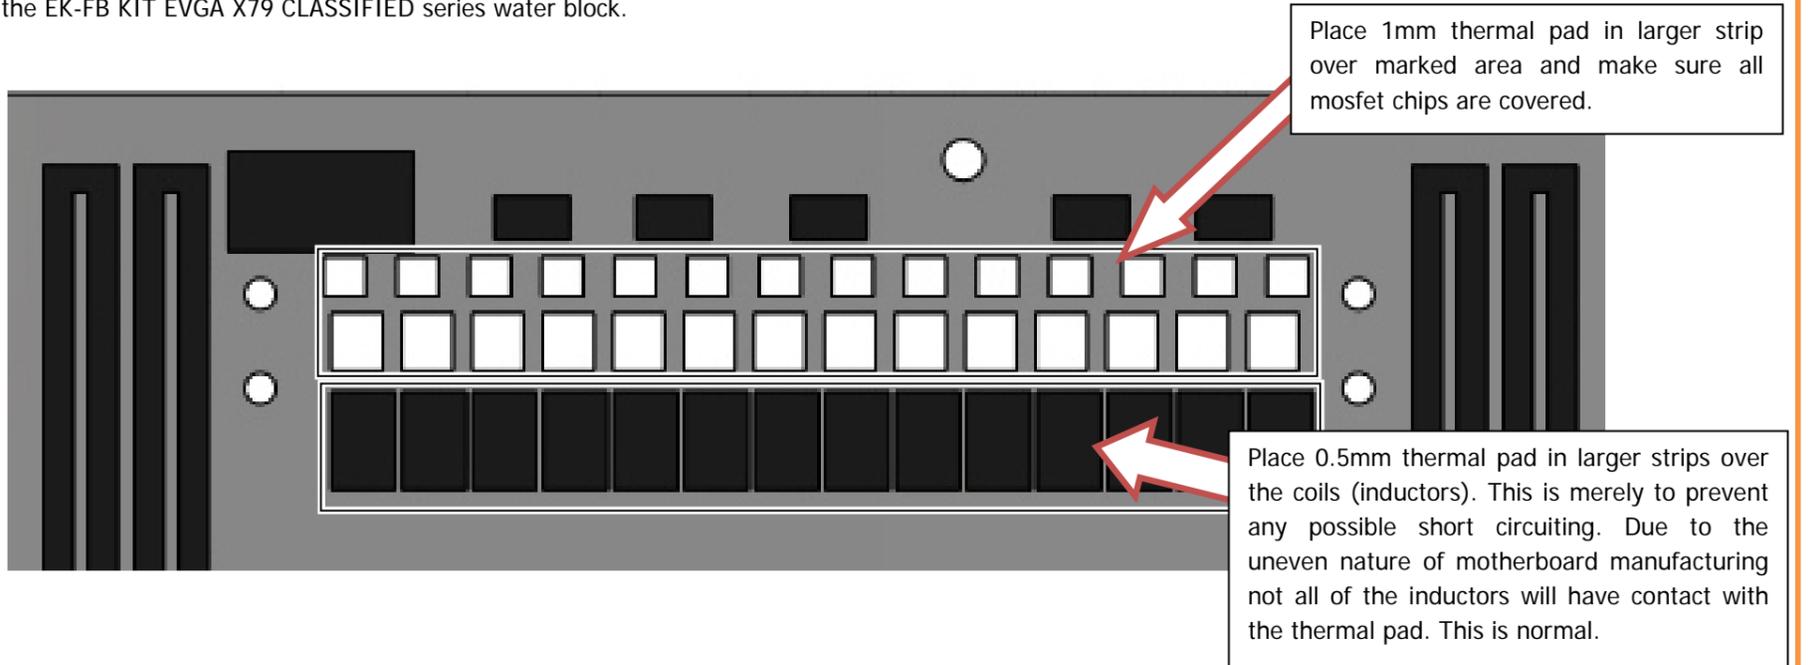


STEP 3: PREPARING YOUR WATER BLOCK

1. PLACING SB BLOCK ON MOTHERBOARD. Place the SB part of the water block with preinstalled 2.1mm standoffs kit gently to the motherboard or vice versa. Make sure that mounting holes are aligned. Skip to STEP 4 on how to fasten the water block to the motherboard using the enclosed screws and washers.

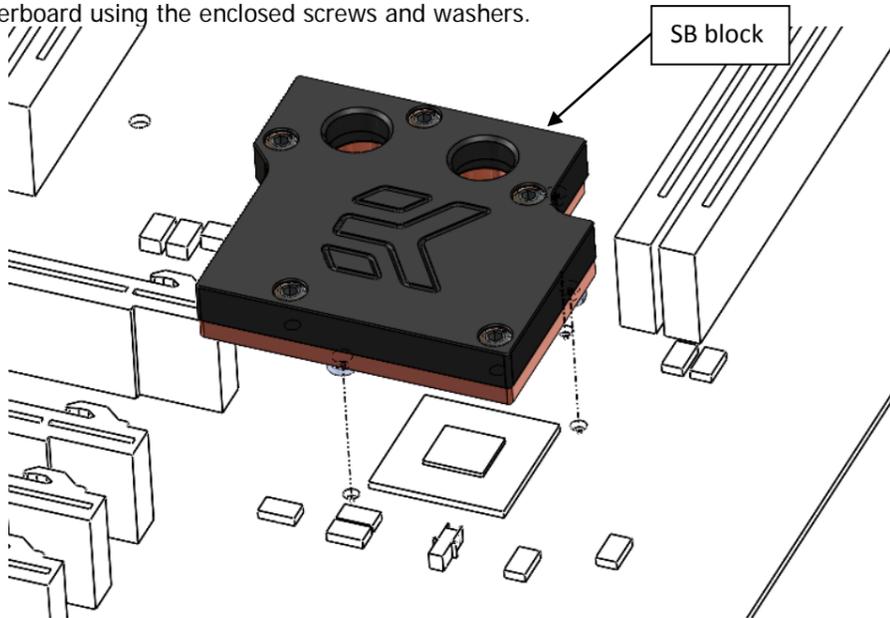

2. PLACING MOSFET BLOCK ON MOTHERBOARD. Place the water block gently to the motherboard or vice versa. Make sure that mounting holes are aligned.

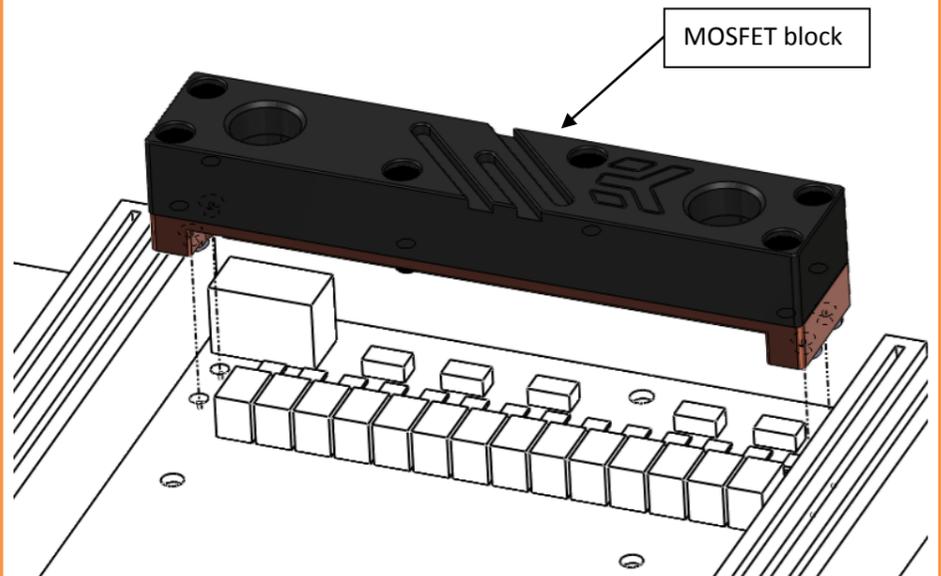


STEP 4: ATTACHING BLOCK TO MOTHERBOARD

Prior to fastening the screws please make sure the mounting holes on the motherboard's circuit board are aligned with water block.

A) **SB block:** Use M2.5x4 DIN7985 and washers. Do not use excessive force when tightening the screws! Make sure you use enclosed washer underneath this screw.


B) **MOSFET block:** Use M2.5x4 DIN7985 and washers. Do not use excessive force when tightening the screws! Make sure you use enclosed washer underneath this screw.

Use the enclosed screws and washers as shown in picture below:

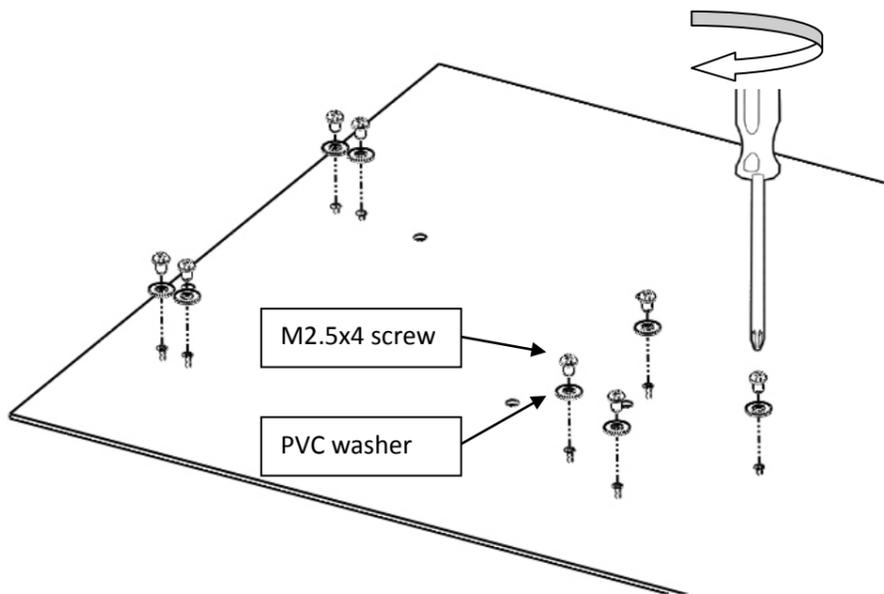


STEP 5: CHECKING FOR CONTACTS

Temporarily remove the water block to check for uniform surface contact between the block and the components. Note the pattern of contact on a piece of paper. Then repeat steps 3 and 4 to reattach the block applying more or less pressure to the areas where you have found it necessary. Note that there is no need for perfect thermal pad imprint on the inductors/coils (mentioned in STEP2)

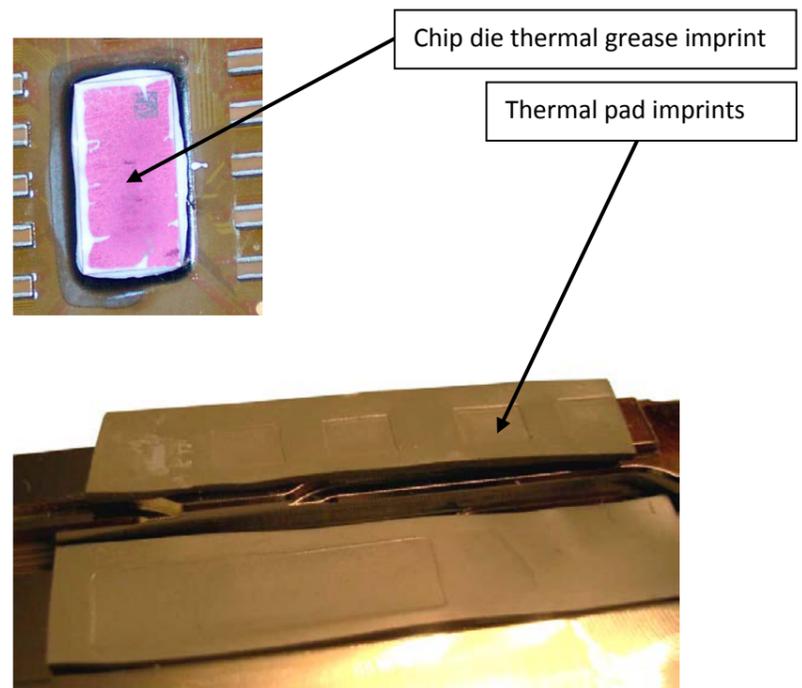

6. POSITIONING FITTINGS AND CONNECTING TO WATER CIRCUIT

Attach the liquid cooling tubes and connect the water-block(s) into the cooling circuit. EKWB recommends using EK-PSC compression fittings with the EK-FB KIT EVGA X79 CLASSIFIED series water block. You can use any opening as an inlet/outlet port (see sample picture). Plan your tubing routing in advance!

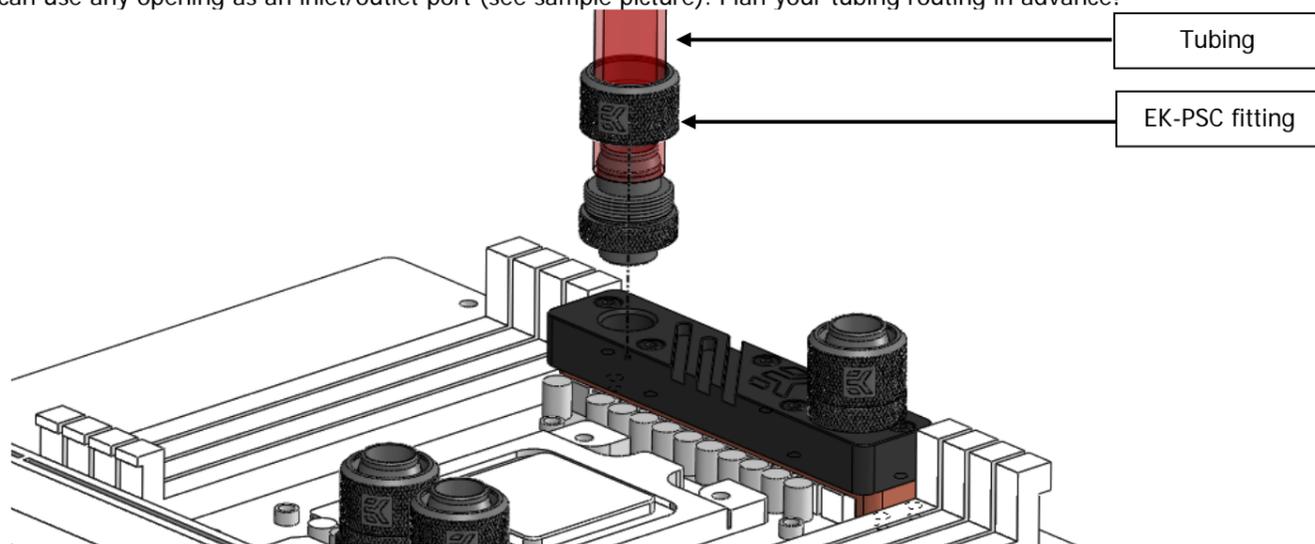

REQUIRED TOOLS AND MOUNTING SCREWS:

