


EK-Quantum Momentum² Aorus Z790 Master X D-RGB - Plexi

MONOBLOCK

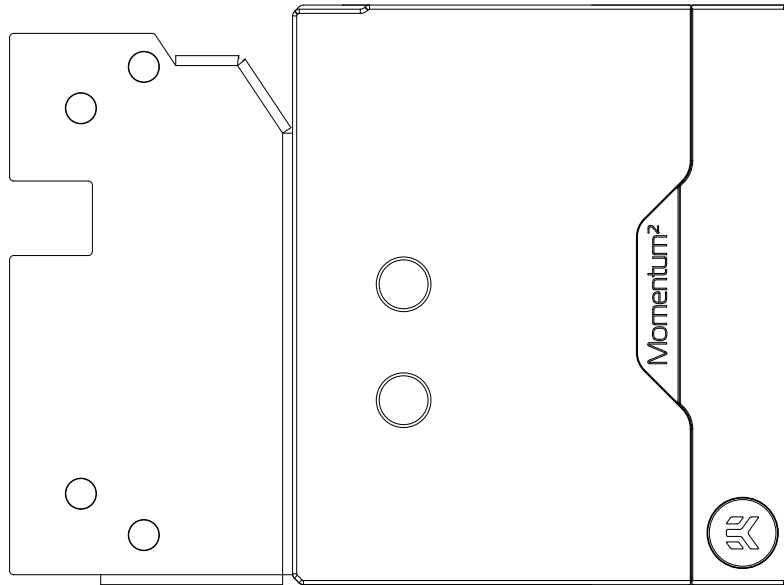

This product is intended for installation only by expert users. Please consult with a qualified technician for installation. Improper installation may result in damage to your equipment. EK Water Blocks assumes no liability whatsoever, expressed or implied, for the use of these products, nor their installation. The following instructions are subject to change without notice. Please visit our website at www.ekwb.com for updates. Before installation of this product please read the important notice, disclosure, and warranty conditions printed on the back of the box.

Before you start using this product, please follow these basic guidelines:

Please carefully read the manual thoroughly before beginning the installation process!

Please remove your motherboard from the computer to assure the safest mounting process in order to prevent any possible damages to your CPU and/or motherboard's circuit board (PCB).


The EK-Fittings require only a small amount of force to screw them firmly in place since the liquid seal is ensured by the rubber o-ring gaskets.

The use of quality, market-proven corrosion inhibiting coolants is always strongly recommended for any liquid cooling system.


TABLE OF CONTENTS

BOX CONTENTS	4
WATER BLOCK DIMENSIONS	5
TECHNICAL SPECIFICATIONS AND WATER BLOCK PARTS	6
PREPARING THE MOTHERBOARD	7
REMOVING THE BACKPLATE	7
REMOVING THE STOCK COOLER	8
REMOVING THE MOSFET COOLER FROM THE STOCK COOLER	9
REMOVING THE MOSFET COOLER	9
ASSEMBLING THE MOSFET COOLER TO THE WATER BLOCK	10
MOUNTING THE STOCK LED COVER TO THE WATER BLOCK	11
REMOVE THE LED COVER FROM THE STOCK COOLER	11
MOUNT THE LED COVER TO THE WATER BLOCK	11
CUTTING AND PLACING THERMAL PADS	12
APPLYING THERMAL COMPOUND	13
PREPARING THE WATER BLOCK FOR INSTALLATION	13
ATTACHING THE WATER BLOCK	14
ATTACHING THE STOCK BACKPLATE	16
CONNECTING THE D-RGB LED STRIP	17
TESTING THE LOOP	17
SUPPORT AND SERVICE	18
SOCIAL MEDIA	18

BOX CONTENTS

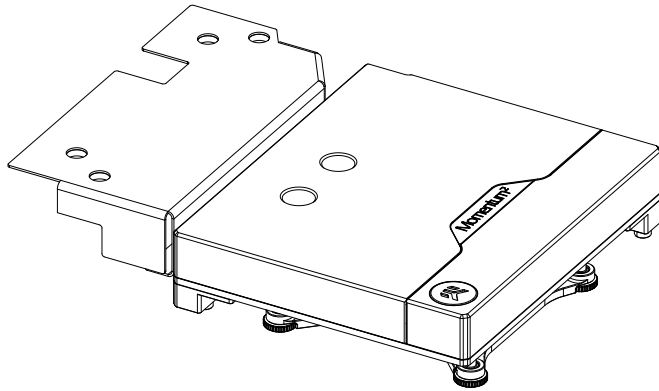


EK-Quantum Momentum² Aorus Z790 Master X D-RGB - Plexi




Thermal Grease (1 pc)




Allen Key 2.5 mm (1 pc)



Thermal PAD F 1.0 mm - (120 x 16 mm)
3830046996732 (2x)




Allen Key 2 mm (1 pc)




Thermal PAD F 1.5 mm - (120 x 16 mm)
3830046996749 (4x)

WATER BLOCK DIMENSIONS

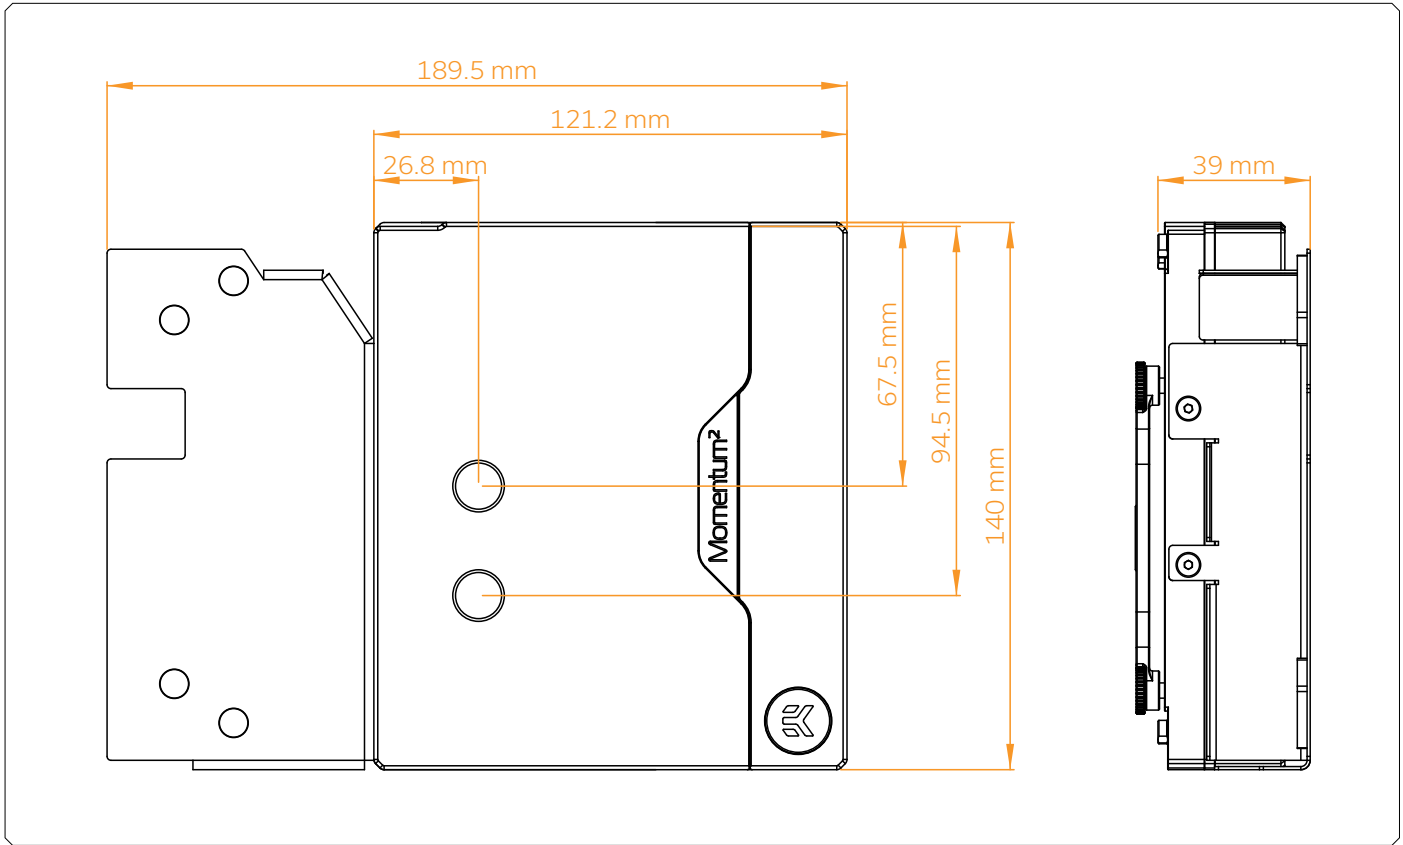


TECHNICAL SPECIFICATIONS AND WATER BLOCK PARTS

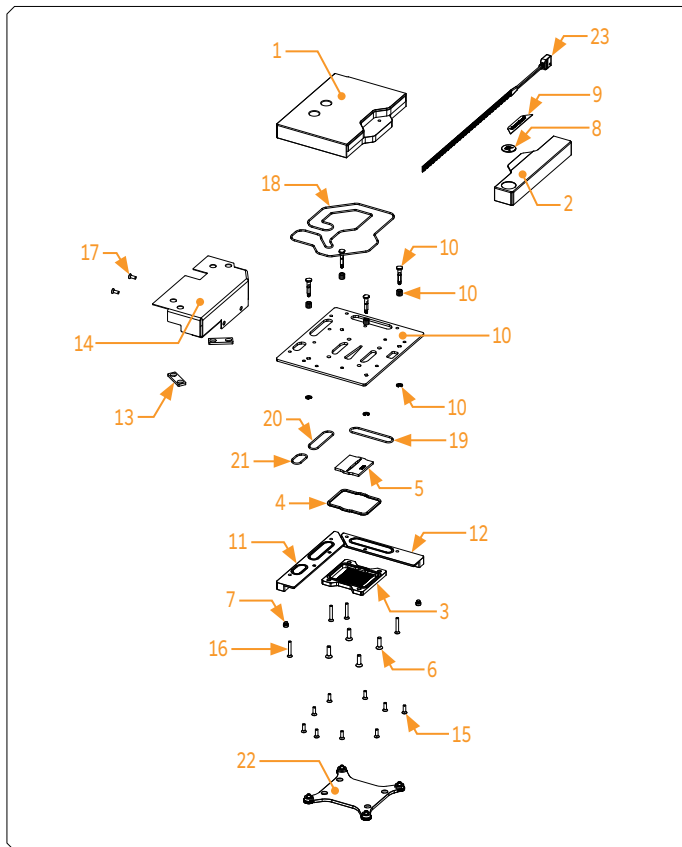

Position	EAN	Description	Quantity
1	107230	TOP plate (Plexi)	1
2	107229	Standout (Acetal)	1
3	104028	Coldplate (Nickel)	1
4	104773	OR - Velocity ² Coldplate	1
5	104029	Jet Plate	1
6	104686	Screw M4 x 12 DIN7991	4
7	100258	Standoff M4 - M2 x 2.5	3
8	100663	EK Badge	1
9	104444	Mylar sticker	1
10	107235	Mid plate assembly	1
11	107231	Mosfet W (Nickel)	1
12	107233	Mosfet S (Nickel)	1
13	107310	IO Cover Support	2
14	107236	IO Cover Stand	1
15	8201N	Screw M3 x 10 DIN7991	9
16	104771	Screw M3 x 20 DIN7991	4
17	8208	Screw M3 x 8 DIN7991	2
18	107496	OR 205 x 1.5	1
19	107495	OR 38 x 1.5	1
20	107494	OR 31 x 1.5	1
21	107493	OR 17 x 1.5	1
22	104650	Backplate	1
23	101946	D-RGB LED Strip	1

PREPARING THE MOTHERBOARD

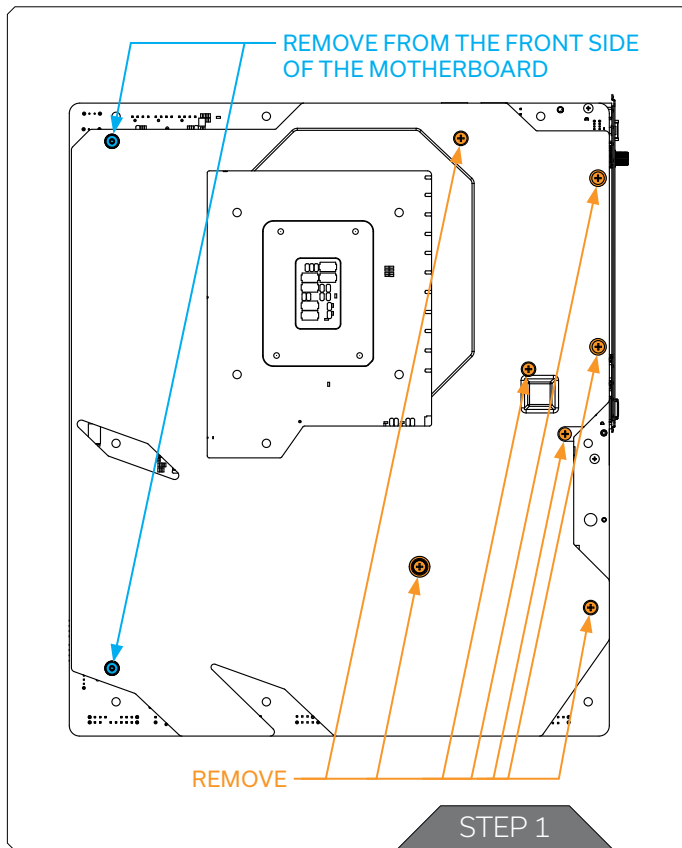


STEP 1 REMOVING THE BACKPLATE



Important! Before starting, make sure to have a clean, flat surface to work on. It is recommended to put foam or soft material to lay the motherboard and the water block on.

Remove the marked screws in order to detach the backplate from the motherboard.

After monoblock installation, the backplate can be reused.

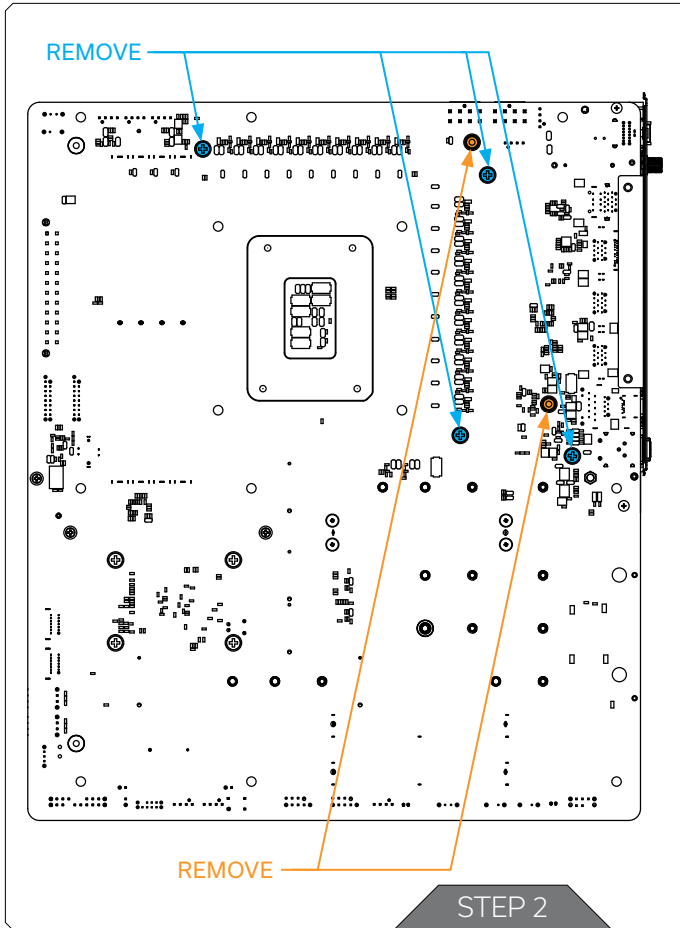

STEP 2 REMOVING THE STOCK COOLER


Additional three (3) screws and three (3) standoffs must be removed to remove the original stock cooler.

After removing the screws and standoffs, carefully detach the stock cooler and pre-applied thermal pad. EK provides replacement thermal pads with the water block

Save the screw and standoffs for later use.

REMOVING THE MOSFET COOLER FROM THE STOCK COOLER


Master X

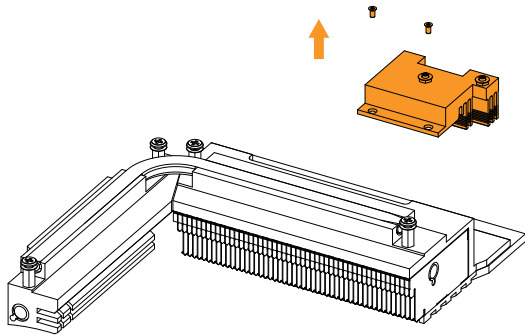

STEP 1 **REMOVING THE MOSFET COOLER**


From the stock cooler remove the two or three screws, (difference from master and master x) that hold the small Mosfet cooler.

Master

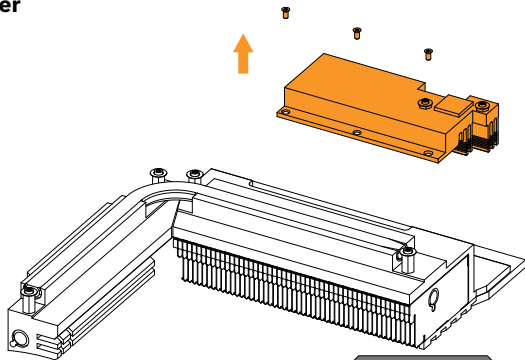

STEP 1


Master X

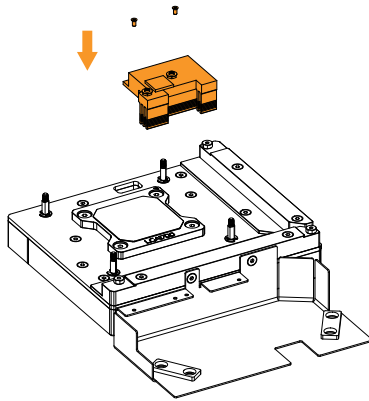

STEP 2 ASSEMBLING THE MOSFET COOLER TO THE WATER BLOCK


Assemble the stock mosfet to the water block. Master with three screws. Master X with two screws.

Master

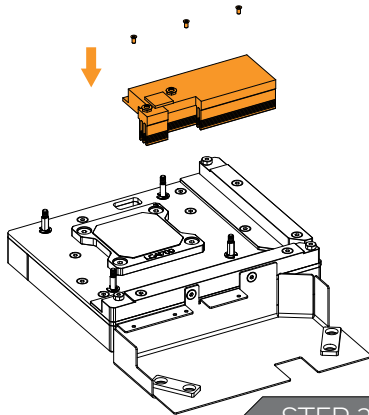


STEP 2

MOUNTING THE STOCK LED COVER TO THE WATER BLOCK

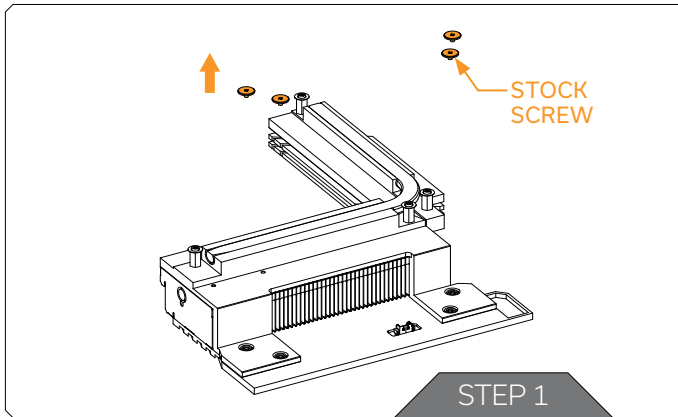

STEP 1 REMOVE THE LED COVER FROM THE STOCK COOLER

Remove four (4) screws from the back of the stock cooler to remove the LED cover. Save the screw for the next step.

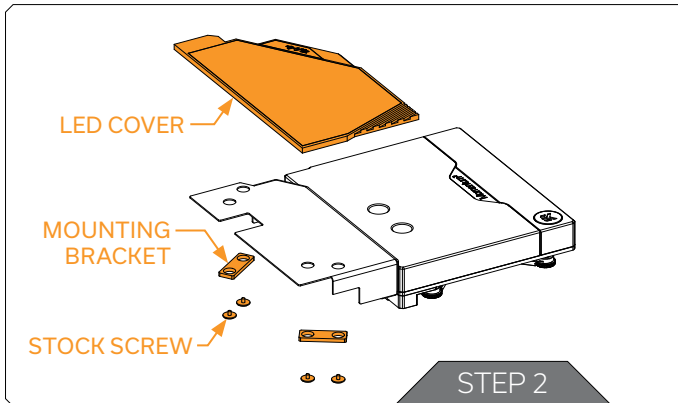

STEP 2 MOUNT THE LED COVER TO THE WATER BLOCK

Use the stock four (4) screws to mount the LED cover and the two (2) special mounting brackets that are in the mounting kit.

CUTTING AND PLACING THERMAL PADS

Thermal Pad F - 1.0 mm (120 x 16 mm)




Thermal Pad F - 1.5 mm (120 x 16 mm)



F1 Thermal Pad - 120 x 16 x 1.0 mm

F1.5 Thermal Pad - 120 x 16 x 1.5 mm

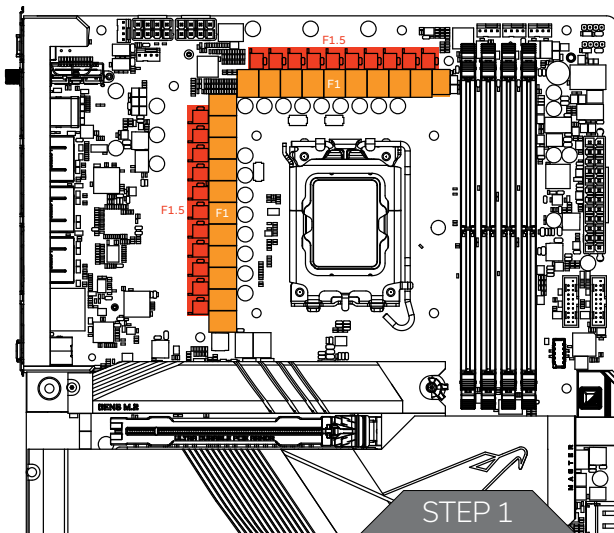

STEP 1

EK-Quantum Momentum² Aorus Z790 Master X D-RGB water block has thermal pads that must be cut into smaller pieces to cover all the area (Mosfet) on the motherboard. EK made sure to provide you with more than adequate Thermal Pads.



Please remove the protective foil from both sides of the thermal pads prior to installation!


Replacement thermal pads:

Thermal Pad F 1.0 mm - (120 x 16mm) EAN 3830046996732


Thermal Pad F 1.5 mm - (120 x 16mm) EAN 3830046996749

For this step, you will need:

Scissors



APPLYING THERMAL COMPOUND

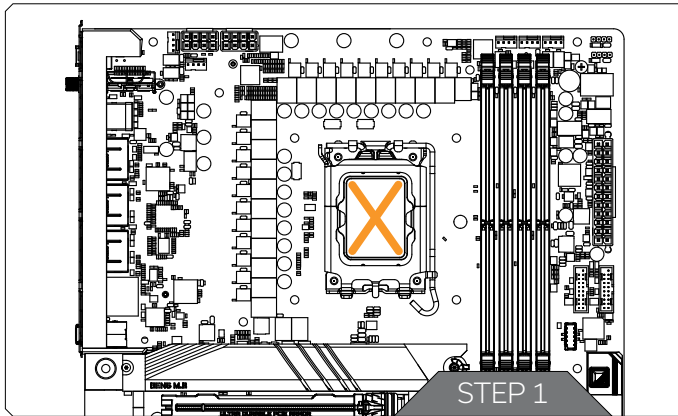

STEP 1


Apply the enclosed thermal grease (thermal compound) on the CPU heat spreader – IHS – as shown in the image. The layer of the thermal compound must be thin and even in thickness over the entire surface of the IHS.




The excessive or uneven application of thermal grease may lead to poor performance!

For this step, you will need:

Thermal Grease




PREPARING THE WATER BLOCK FOR INSTALLATION

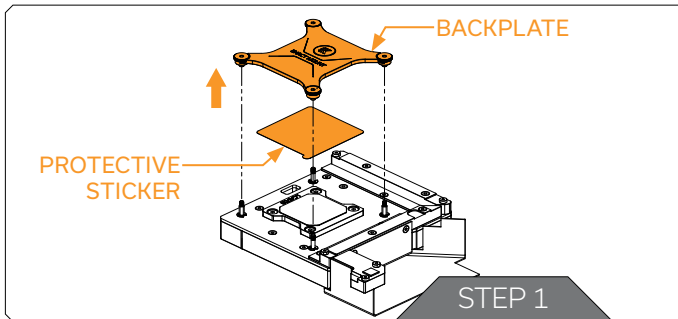

STEP 1

Unscrew four (4) Velocity² mounting nuts (turn them in an anticlockwise direction to unscrew). Remove the backplate and save it for later steps. After the backplate is removed, do not forget to peel off the protective sticker.

ATTACHING THE WATER BLOCK

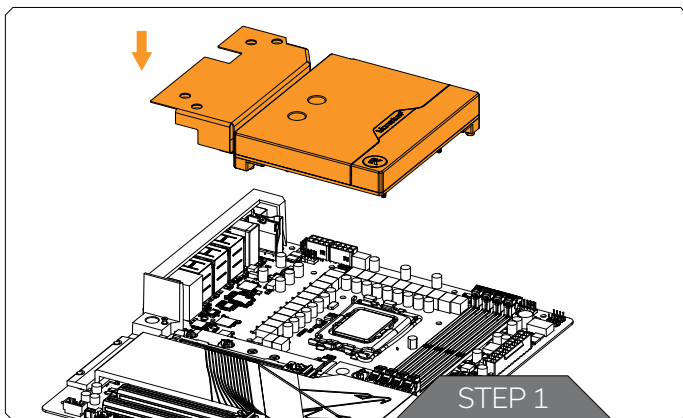


STEP 1

Carefully place the water block onto the motherboard and align four (4) mounting screws with four (4) holes on the motherboard. Hold the water block and the motherboard and turn them upside down.



Before placing the Water Block on the motherboard, make sure all the Thermal Pads are placed correctly! (Chapter: Cutting and placing thermal pads).

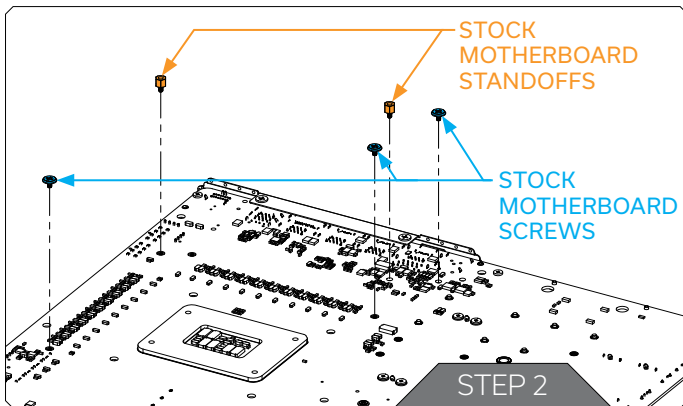


STEP 2


Secure the water block using three (3) stock motherboard screws and two (2) stock motherboard standoffs. Do not use excessive force!

EK recommends using the EK-Loop Torque Screwdriver - 0.6Nm: <https://www.ekwb.com/shop/ek-loop-torque-screwdriver-0-6nm>.

For this step, you will need:

Phillips Head Screwdriver



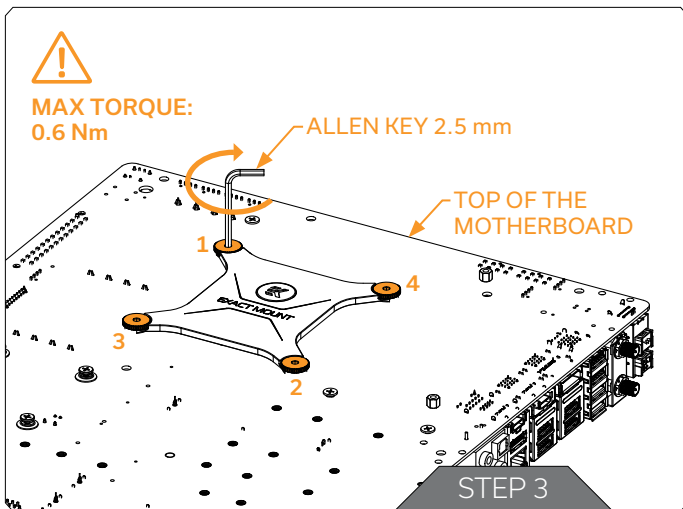



STEP 3

After securing the water block, the stored backplate must be attached to the backside of the motherboard using Allen Key 2.5 mm (shown in the picture) or EK-Loop Torque Screwdriver. Start fastening the backplate screws in a cross pattern. Do not tighten fully until all of the nuts are partially screwed in. **The Allen Key 2.5 mm must be used in a standing position! Otherwise, the mounting screws may crack during tightening!**

Make sure to orientate the backplate as illustrated. Incorrect installation of the backplate may result in damage to the motherboard.

The motherboard backplate can be reused after the water block is secured.

For this step you will need:

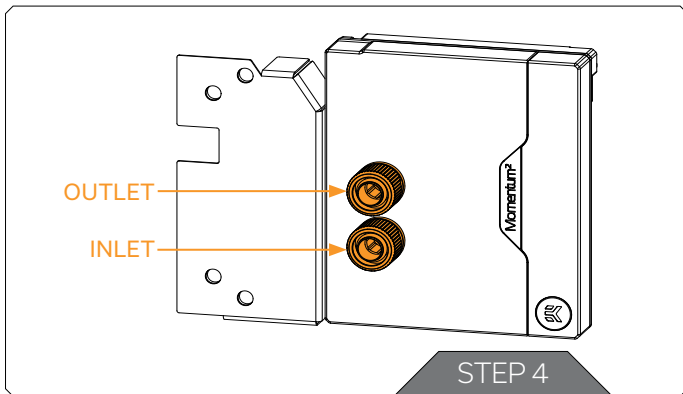


STEP 4

With the **EK-Quantum Momentum² Aorus Z790 Master X D-RGB** water block, it is mandatory to use the bottom port as the INLET. Mixing the ports may result in poor thermal performance of the water block.

Tighten the fittings in a clockwise direction until the gasket underneath is compressed.

The installation of the water block is now complete.

ATTACHING THE STOCK BACKPLATE

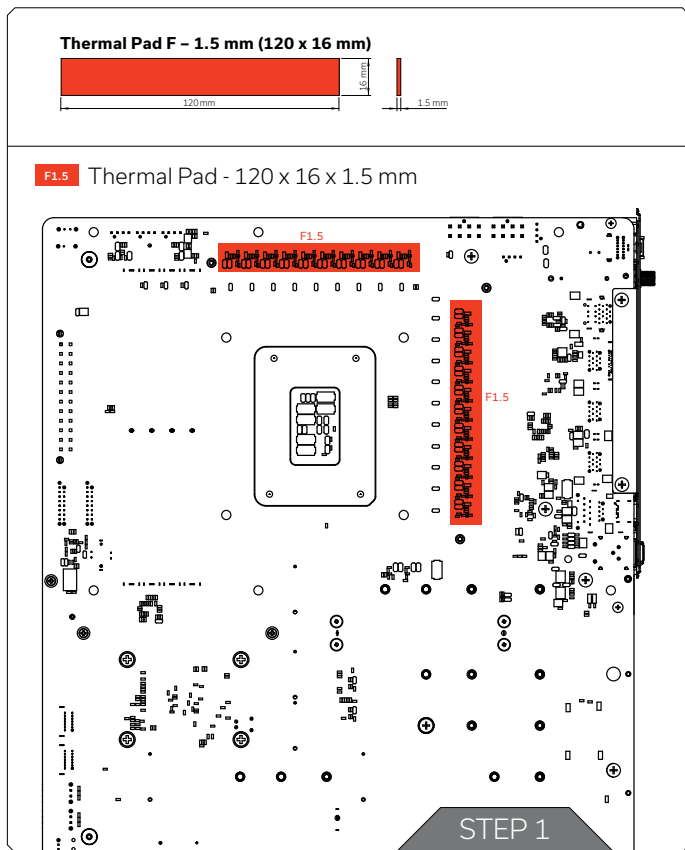


STEP 1

Put the provided thermal pads on the back of the motherboard. Thermal Pads need to be cut into smaller pieces to cover the assigned area shown in the drawing.

Replacement thermal pads:

Thermal Pad F 1.5 mm - (120 x 16mm) EAN 3830046996749


For this step, you will need:



STEP 2

Assemble the stock backplate back on the motherboard. Using the screws and standoffs that you removed in STEP1, Preparing the motherboard.

CONNECTING THE D-RGB LED STRIP

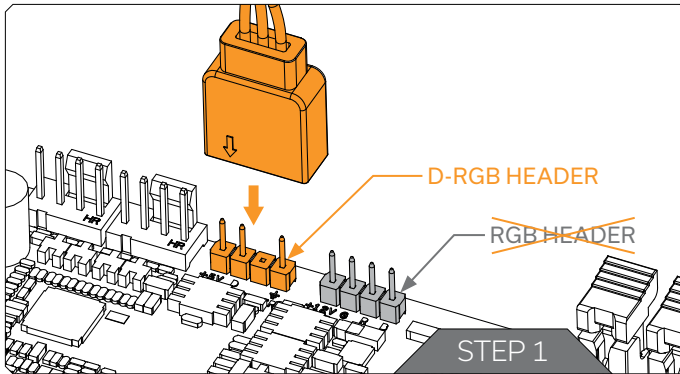

STEP 1

Plug the 3-Pin connector from the water block's D-RGB LED light to the DRGB HEADER on the motherboard. The LED will work if the pin layout on the header is as follows: +5V, Digital, empty, Ground.



Please ensure that the arrow indicated on the connector is plugged into the +5V line as indicated on your motherboard. If you put the LED Diode to the 12V RGB HEADER you can damage the LEDs. Failure to do so will damage your motherboard or LED strip.

TESTING THE LOOP

To make sure the installation of EK components was successful, we recommend you perform a leak test for 24 hours. When your loop is complete and filled with coolant, connect the pump to a PSU outside of your system. Do not connect power to any of the other components. Turn on the PSU and let the pump run continuously. It is normal for the coolant level to drop during this process as air collects in the distribution plate. Inspect all parts of the loop, and in the eventuality, that coolant leaks, fix the issue and repeat the testing process. Ensure that all hardware is dry before the system is powered on in order to prevent any damage.

SUPPORT AND SERVICE

In case you need assistance or wish to order spare parts or a new mounting mechanism, please contact:


<https://www.ekwb.com/customer-support/>

For spare parts orders, refer to the page with "TECHNICAL SPECIFICATIONS AND WATER BLOCK PARTS" where you can find the EAN number of each part you might need.


Include the EAN number with quantity in your request. Mounting Mechanism EAN can be found under "BOX CONTENTS"

Thermal pads are readily available in the EK shop

SOCIAL MEDIA

 EKWaterBlocks

 @EKWaterBlocks

 ekwaterblocks

 EKWBofficial

 ekwaterblocks

