


This product is intended for installation only by expert users. Please consult with a qualified technician for installation. Improper installation may result in damage to your equipment. EK Water Blocks assumes no liability whatsoever, expressed or implied, for the use of these products, nor their installation. The following instructions are subject to change without notice. Please visit our web site at www.ekwb.com for updates. Before installation of this product please read important notice, disclosure and warranty conditions printed on the back of the box.

STEP 1: GENERAL INFORMATION. Sample picture of ASUS Radeon ROG RX Vega 64 STRIX 8GB

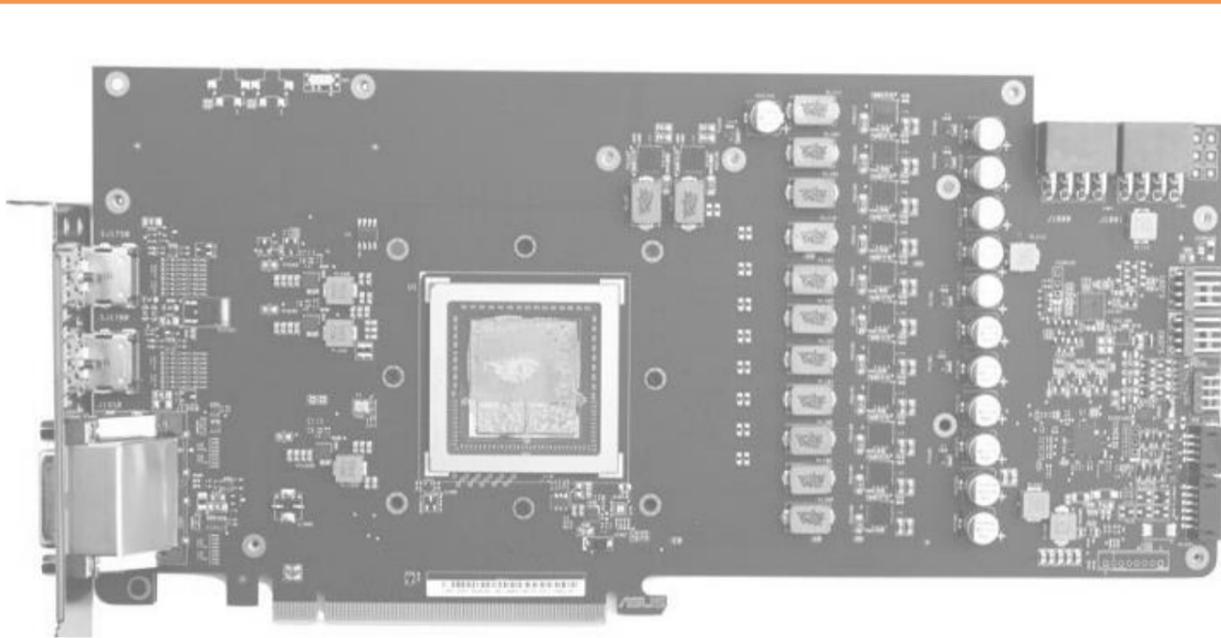


BAG CONTENT: Bag content is universal for multiple EKWB Backplates. You may not need all screws.

| | | |
|---|---|---|
|  |  |  |
| M2.5x4 AX1 | M2.5x7 AX1 | M2.5 PVC washer |
| 3pcs | 7pcs | 10pcs |
|  |  | |
| M2,5x6 AX1 | M2,5 Nut | |
| 7pcs | 5pcs | |
| Replacement gear: Mounting FC Backplate - Tip E (EAN: 3831109872208) | | |


STEP 2: PREPARING YOUR GRAPHICS CARD

EK-FC Radeon Vega Strix Backplate is very easy to install. First install EK-FC Radeon Vega Strix series water block according to its installation manual. If you have it already installed, please check the picture below to see which mounting screws are to be left in their position and which are to be removed. Please remove the six (6) M2.5x4 AX1 screws and their PVC washers as well (marked with arrow).

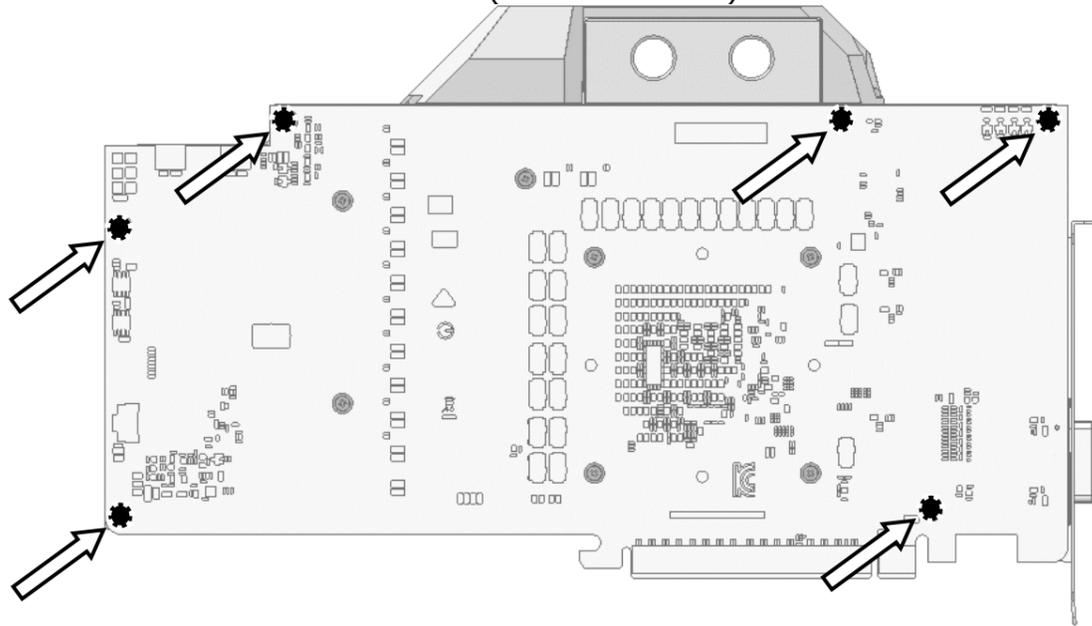

STEP 3: APPLYING THE THERMAL PADS

EK-FC Radeon Vega Strix Backplate features passive cooling of the printed circuit board and its components therefore it is mandatory to install the enclosed thermal pad. Please install enclosed 1mm thick thermal pad (Thermal Pad G – 1,0mm (120x24)) as shown on the picture below. You may need to trim the excess thermal pad.

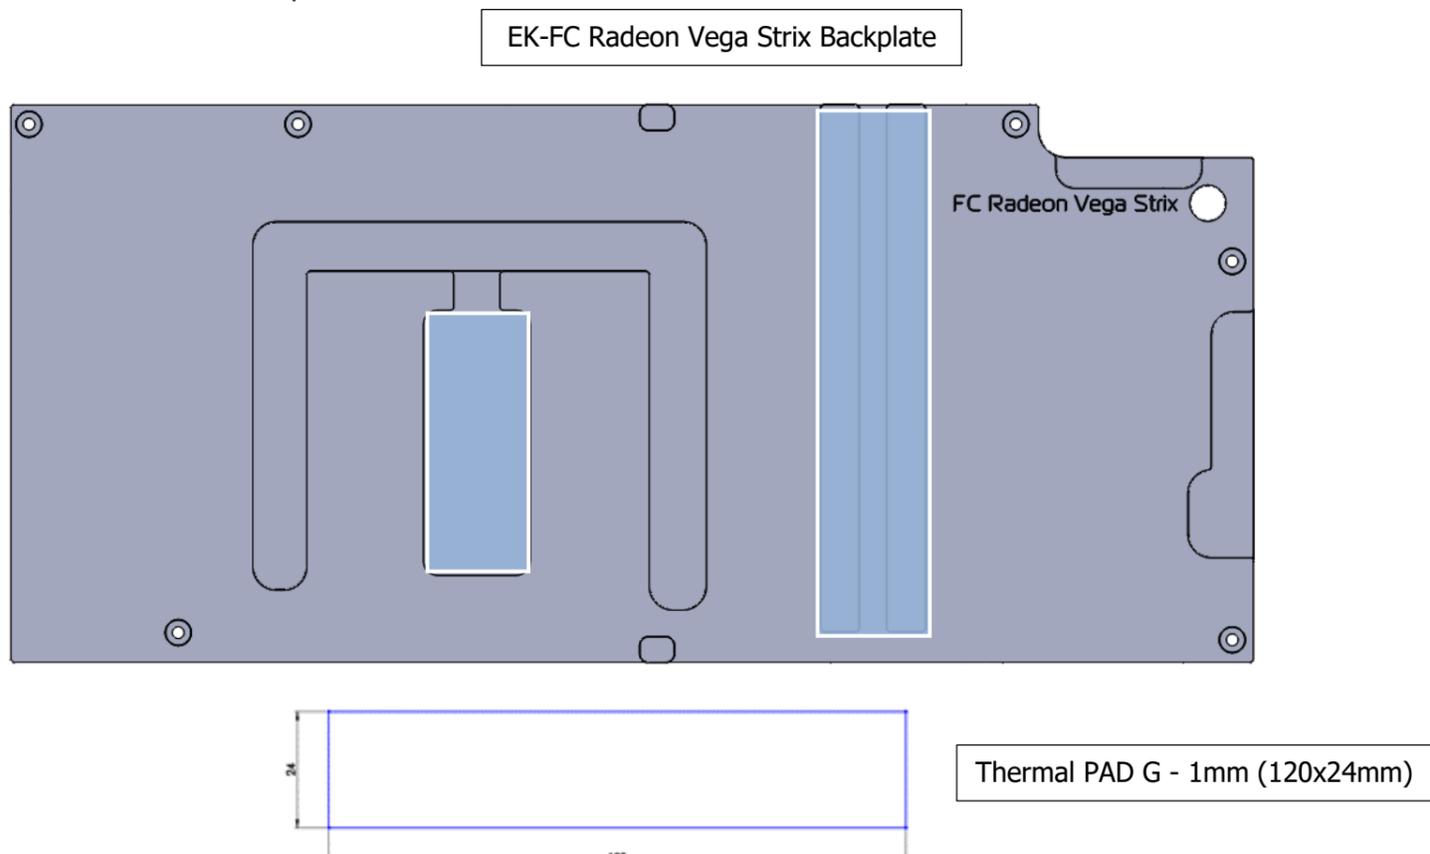


STEP 4: ATTACHING EK-FC Radeon Vega Strix BACKPLATE TO THE GRAPHICS CARD

Take enclosed mounting screws and install them as shown on picture below. Use six (6) M2.5x7 AX1 screws from the top of the backplate. Tighten them using Philips head screwdriver.

HINT: Do not tighten screws until they are all positioned in their mounting holes. The backplate has milled in standoffs, so there is no fear of over tightening of the screws. Nevertheless do not exaggerate with screwing force as there is no need for it. During installation of the backplate you can notice a slight bend of the backplate due to not fully compressed thermal pads. During few heating cycles the thermal pads should adjust to the shape of the gap and the backplate should level up.

By all means users must also consider that this product is intended to be used only with EK-FC Radeon Vega Strix series water blocks. No other 3rd party heat sinks or coolers are officially supported! EK does not offer any assistance or support in the latter application.

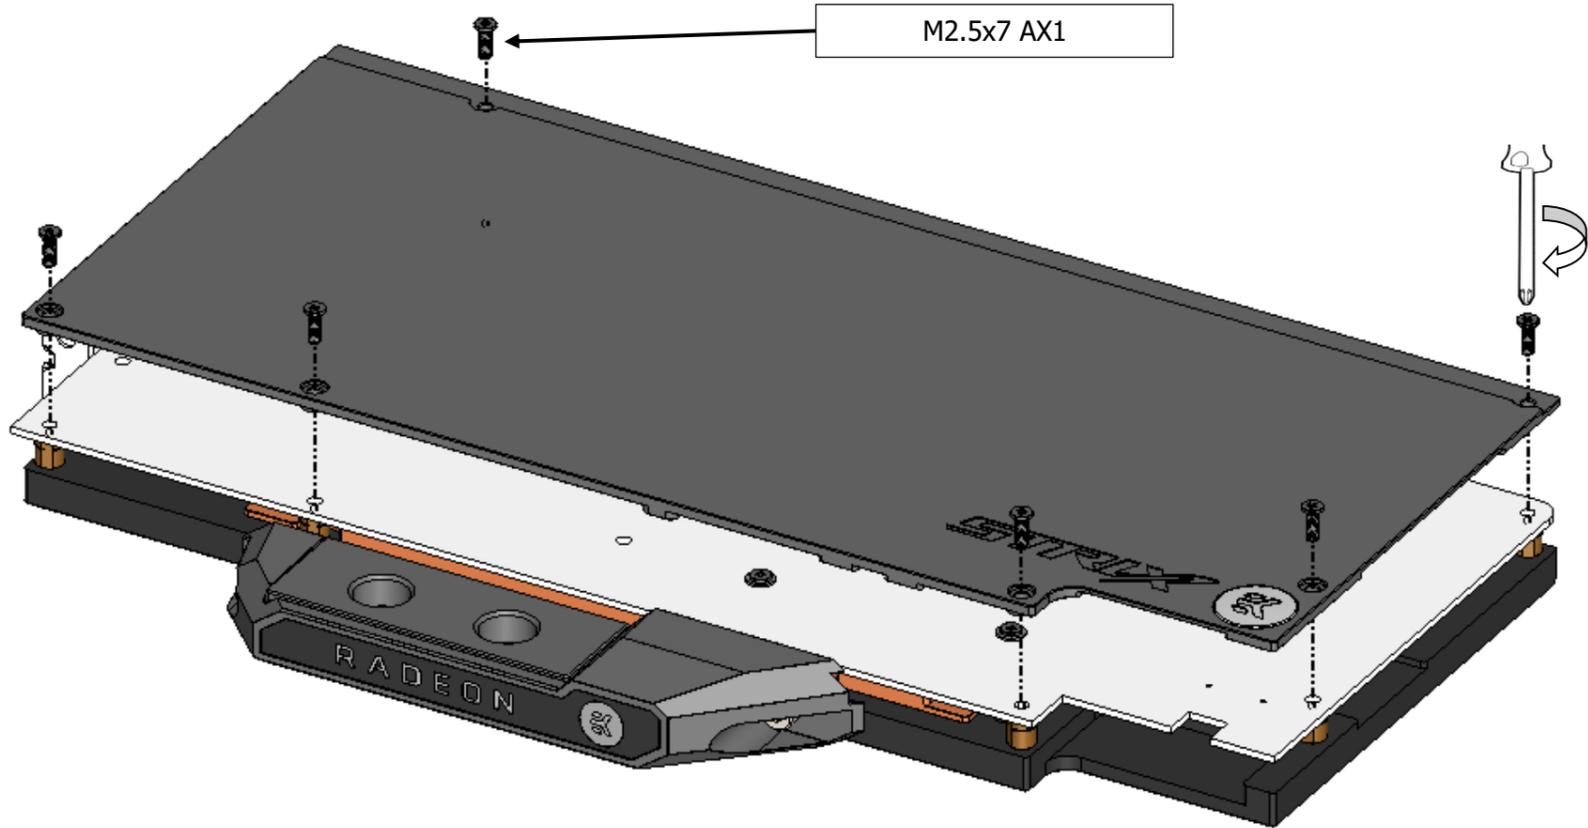

IMPORTANT DISCLOSURES

VERY IMPORTANT NOTICE: Once the installation is completed, it is a recommended practice to test the cooling circuit for leaks prior to powering up the computer. We recommend a 24 hour leak test prior to powering up the computer. Do not test the water block using city water pressure. This will rupture the top of the housing and render the block unusable (and will void your warranty). While all efforts have been made to provide the most comprehensive tutorial possible, EK Water Blocks assumes no liability expressed or implied for any consequential damage(s) occurring to your equipment as a result of using EK Water Blocks cooling products, either due to errors or omissions on our part in the above instructions, or due to failure or defect in the EK Water Blocks cooling products.

WARRANTY:

Our products are warranted against defects in materials or workmanship for a period of 24 months beginning from the date of delivery to the final user. During this period, products will be repaired or have parts replaced at our discretion provided that: (I) the product is returned to the agent from whom it was purchased; (II) the product has been purchased by an end user and has not used for commercial purposes; (III) the product has not been misused, handled carelessly, or used in a manner other than in accordance with the instructions provided describing its installation and proper use. This warranty does not confer rights other than those expressly set out above and does not cover any claims for consequential loss or damage. This warranty is offered as an extra benefit and does not affect your statutory rights as a consumer. This warranty is voided if the product comes in contact with aggressive UV additives or other improper liquids. EK blocks are sealed with warranty void circular label, which proves that the block has withstood a pressure leak test. Removing it will void leak-free guarantee and not the guarantee on the product itself. Any other RMA issues can be reported to EK Support at <http://www.ekwb.com/support> for further analysis.

(This space is intentionally left blank)

REQUIRED TOOLS AND MOUNTING SCREWS:



Philips head screwdriver



scissors