



This product is intended for installation only by expert users. Please consult with a qualified technician for installation. Improper installation may result in damage to your equipment. EK Water Blocks assumes no liability whatsoever, expressed or implied, for the use of these products, nor their installation. The following instructions are subject to change without notice. Please visit our web site at www.ekwaterblocks.com for updates. Before installation of this product please read important notice, disclosure and warranty conditions printed on the back of the box.

STEP 1: GENERAL INFORMATION. Sample picture of nVidia GeForce Titan Z

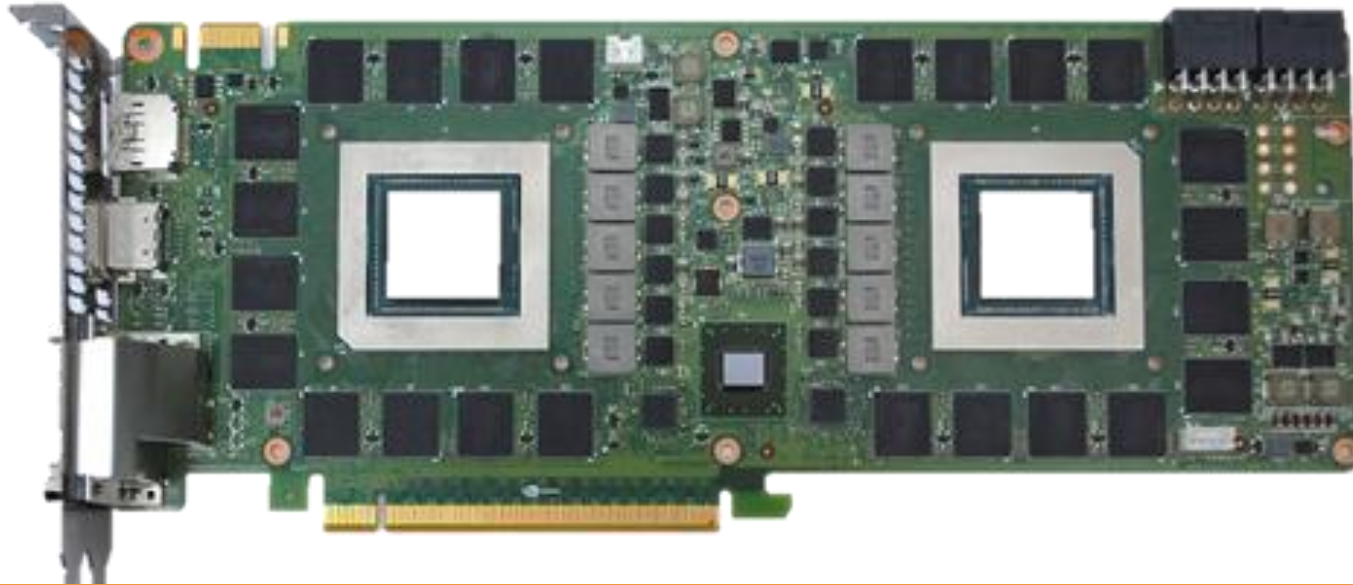


STEP 2: PREPARING YOUR GRAPHICS CARD

EK-FC Titan Z Backplate is very easy to install. First install EK-Titan Z water block according to its manual. If you have it already installed the water block please check the picture below to see which mounting screws are to be left in their position and which are to be removed. Please remove the six (6) screws marked with arrow. Apply thermal pads on RAMs 3x Thermal Pad D – 0.5mm (8xRAM).

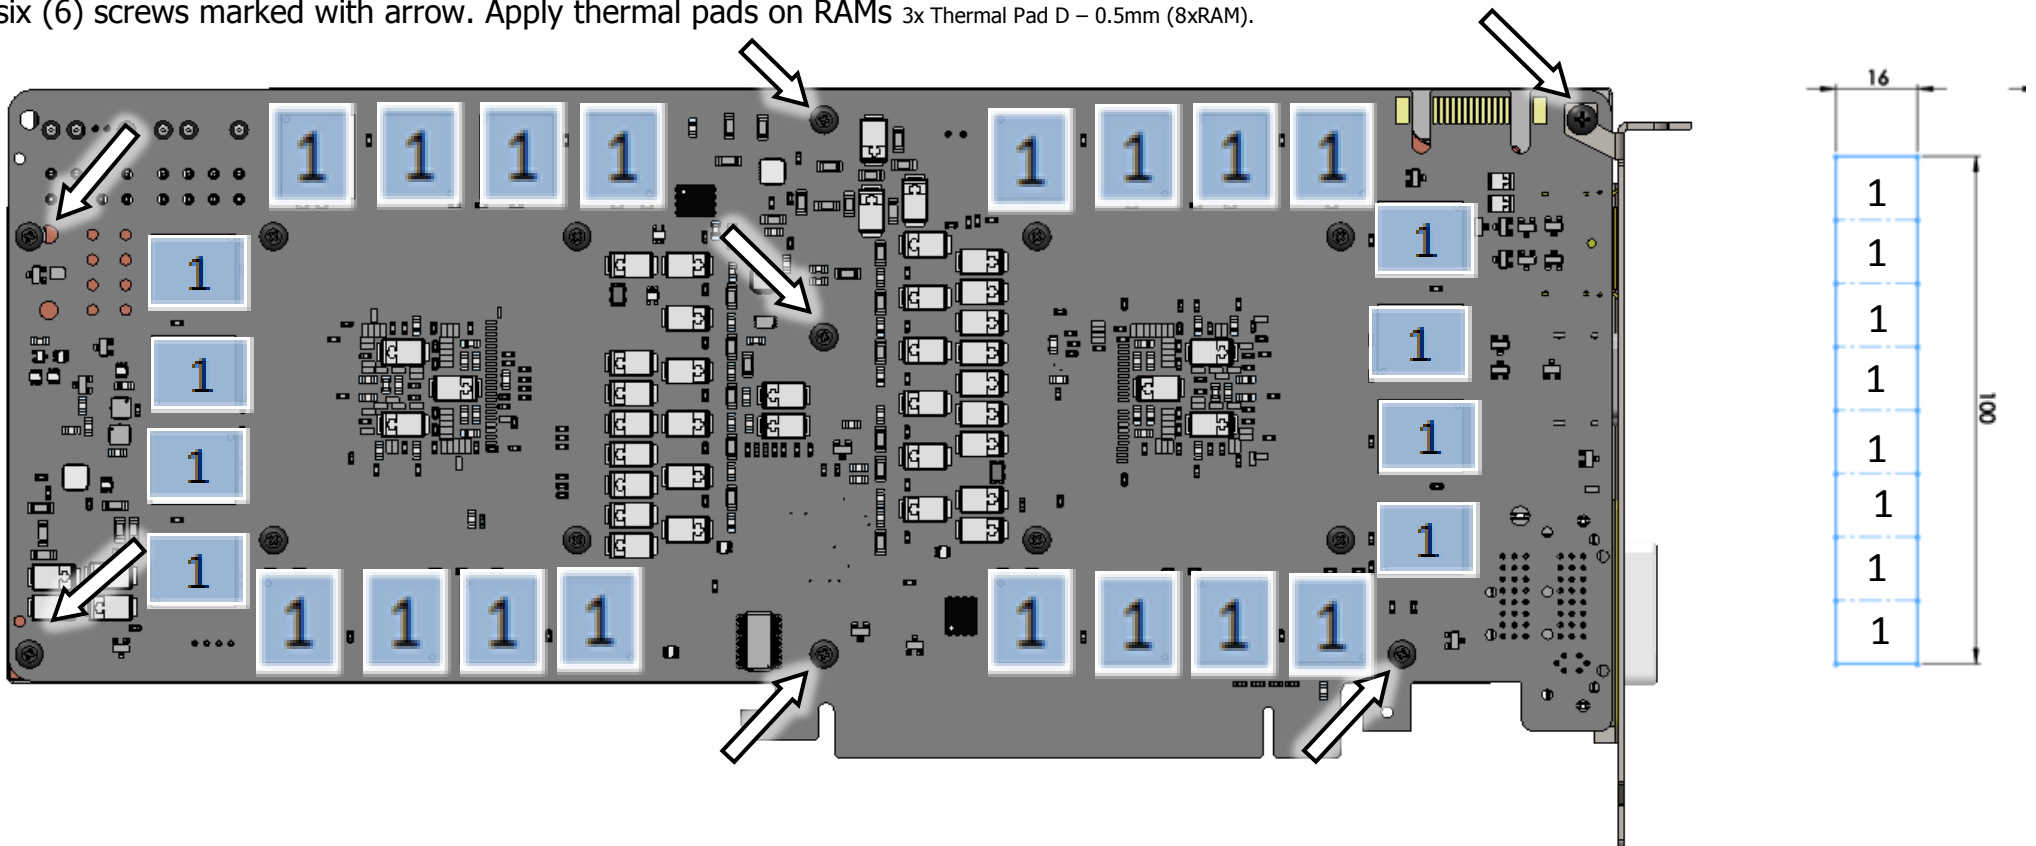

STEP 3: APPLYING THE THERMAL PADS


EK-FC Titan Z Backplate features passive cooling of the printed circuit board and it's components therefore it is mandatory to install the enclosed thermal pad. Please install enclosed 0,5mm thick thermal pad (Thermal Pad A – 0,5mm (100x16)) and 1,5mm thick thermal pad (Thermal Pad C – 1,5mm (50x25)) directly on the large extruded stub on the back plate itself as shown on the picture below. You need to trim the excess thermal pad.

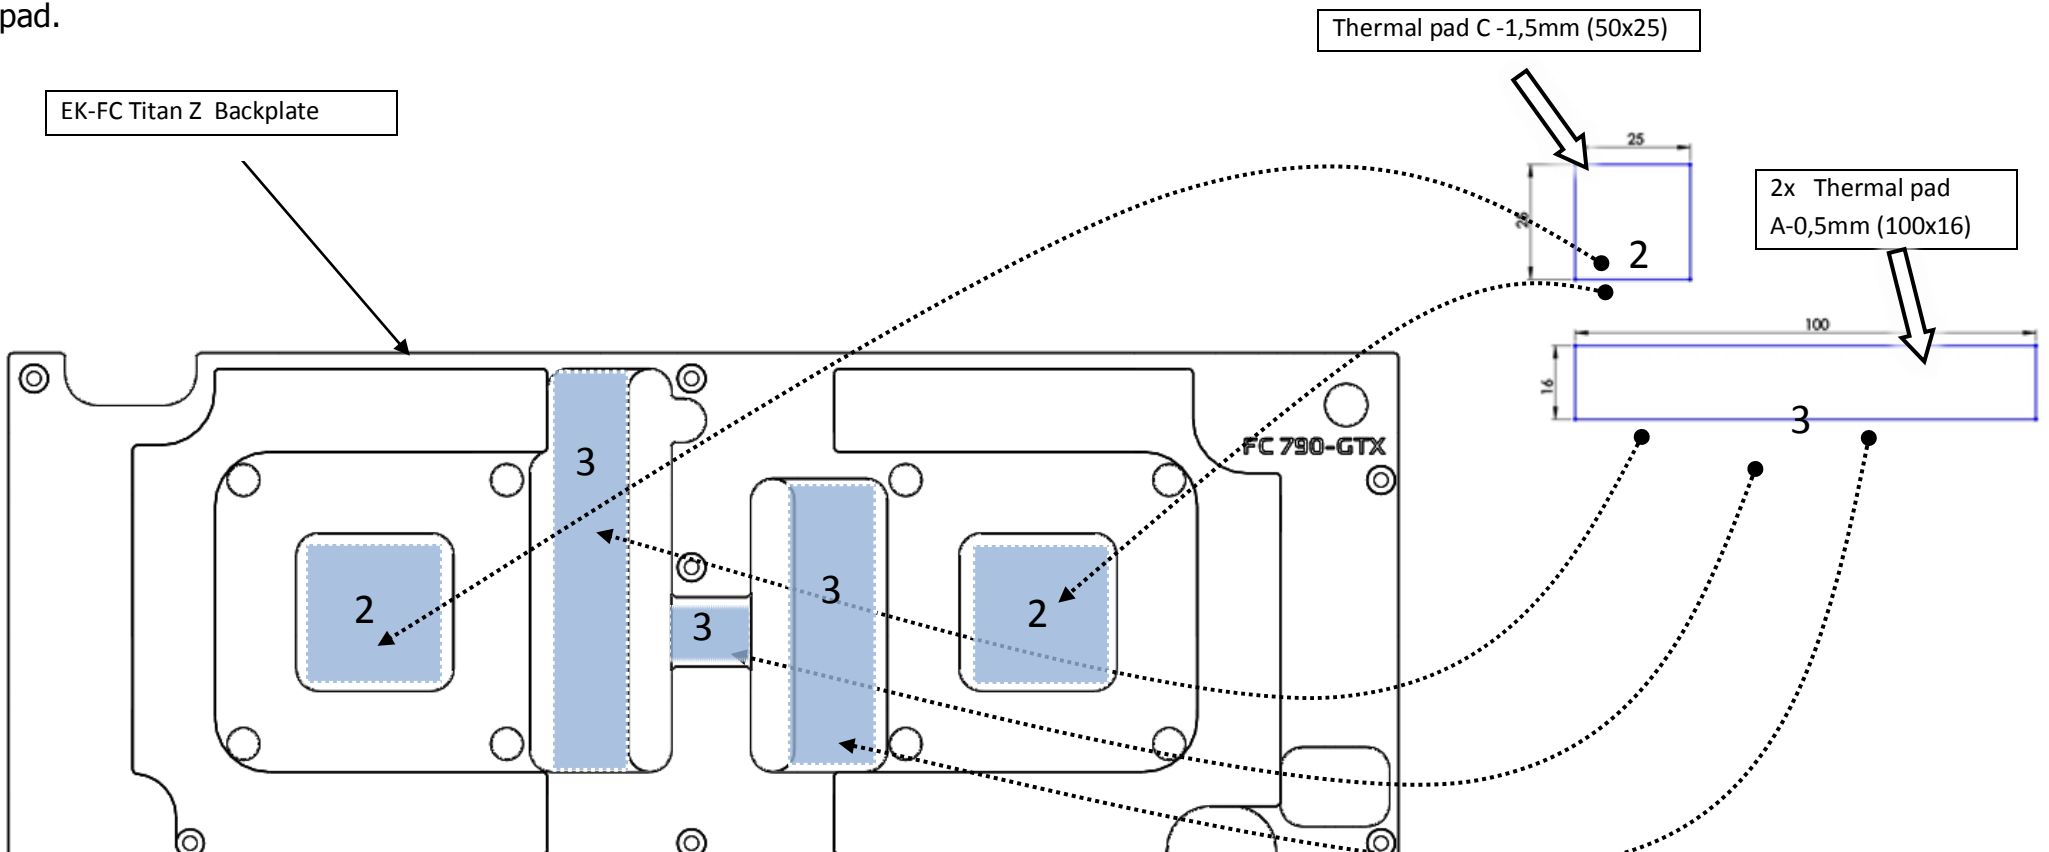

STEP 3: ATTACHING EK-FC Titan Z BACKPLATE TO THE GRAPHICS CARD

Take enclosed mounting screws and install them as shown on picture below. EKWB recommends users to start with two (2) M2.5x6 DIN7985 screws (HINT: do not tighten screws until they are all positioned in their mounting holes) in the middle of the card and then continue with mounting of four (4) remaining M2.5x8 DIN7985 screws. In the end tighten M3x6 DIN7985 screw. Backplate has milled in standoffs, so there is no fear of over tightening of the screws. Nevertheless do not exaggerate with screwing force as there is no need for it.

(Please note that EKWB holds no responsibility of any kind if assembly is not made by instructions. This applies also for all products that are not out of EKWB production line. Users must by all means also consider instructions that are being made for proper use of FC blocks.)

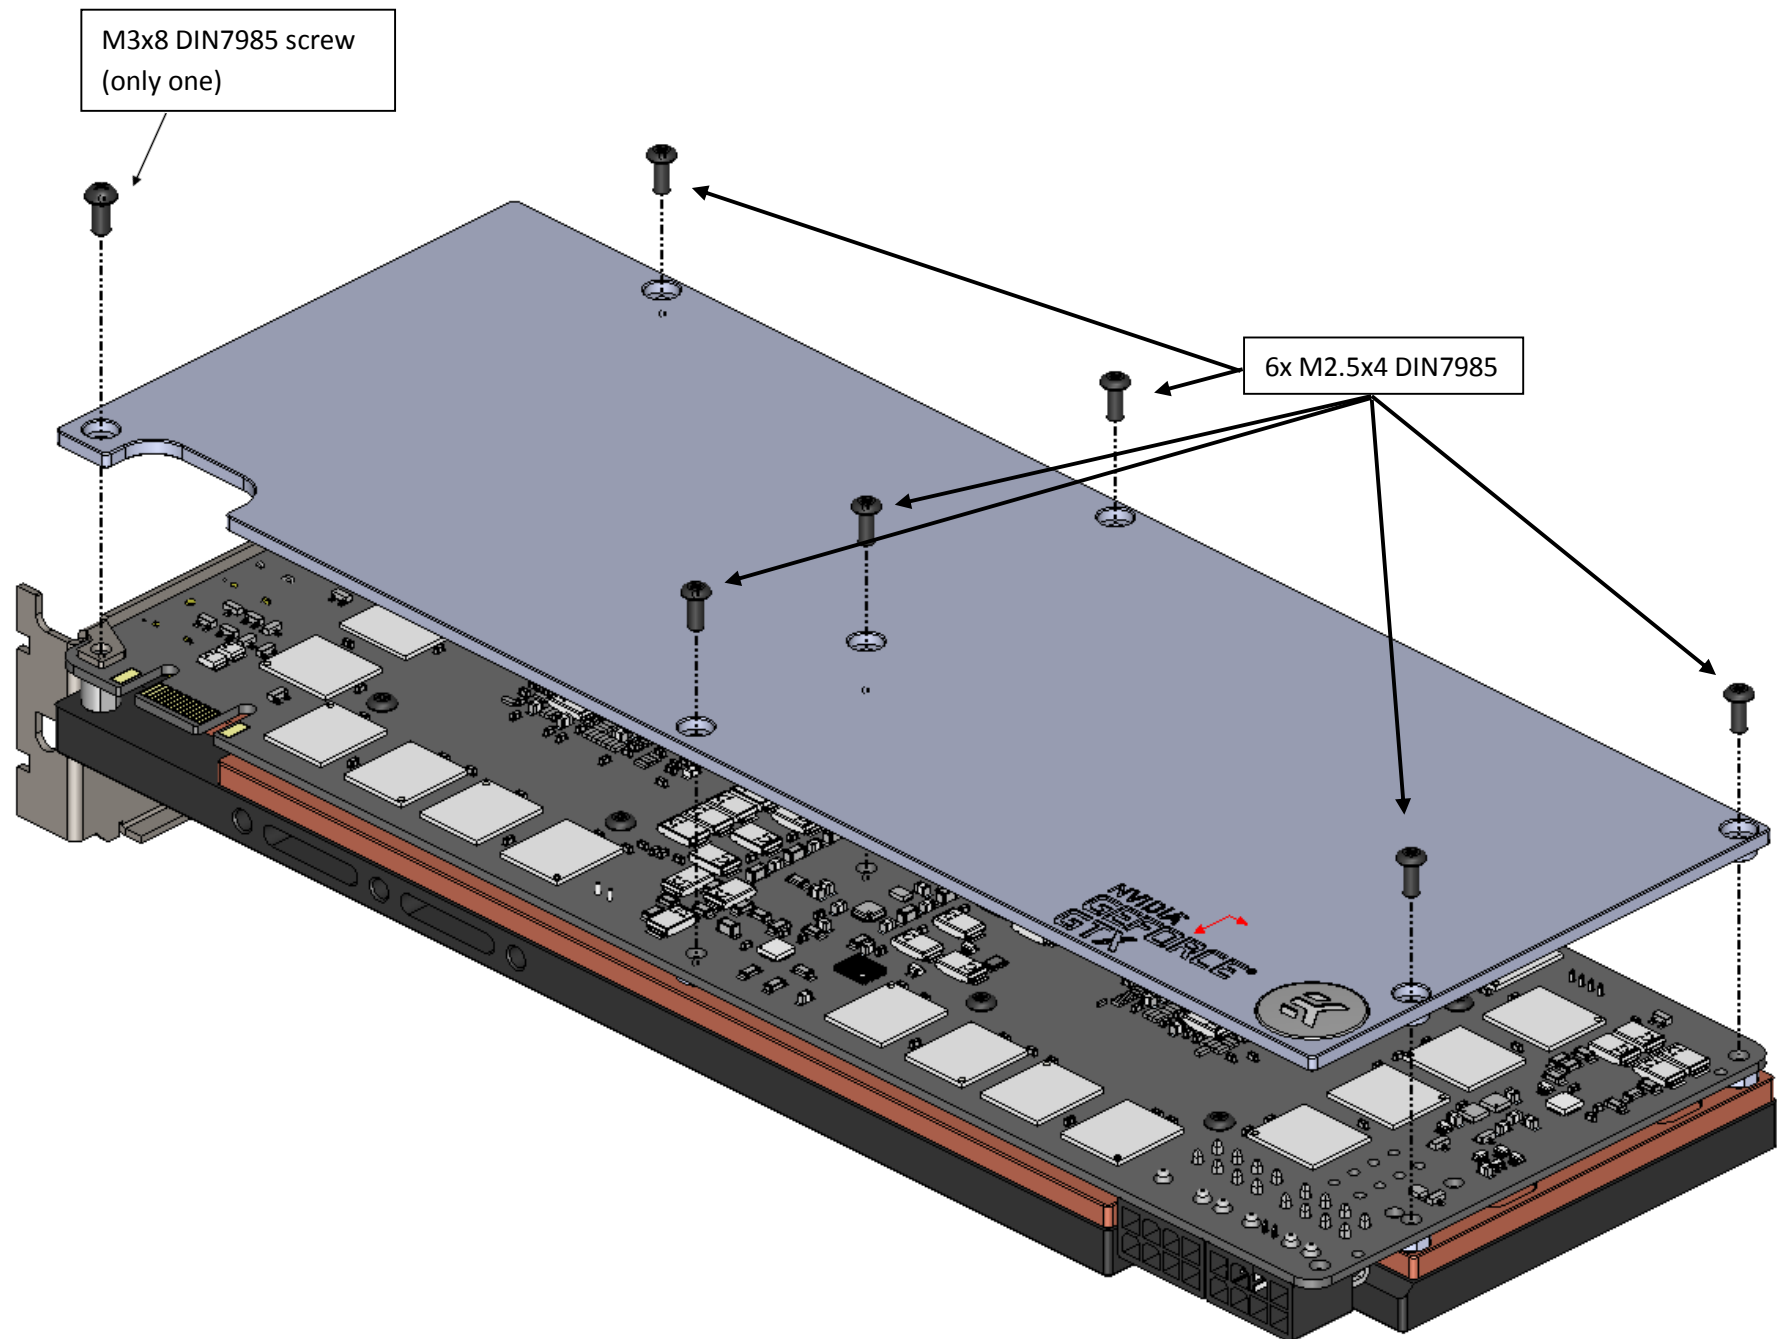

IMPORTANT DISCLOSURES

VERY IMPORTANT NOTICE: Once the installation is completed, it is a recommended practice to test the cooling circuit for leaks prior to powering up the computer. We recommend a 24 hour leak test prior to powering up the computer. Do not test the water block using city water pressure. This will rupture the top of the housing and render the block unusable (and will void your warranty). While all efforts have been made to provide the most comprehensive tutorial possible, EK Water Blocks assumes no liability expressed or implied for any consequential damage(s) occurring to your equipment as a result of using EK Water Blocks cooling products, either due to errors or omissions on our part in the above instructions, or due to failure or defect in the EK Water Blocks cooling products.

WARRANTY:

Our products are warranted against defects in materials or workmanship for a period of 24 months beginning from the date of delivery to the final user. During this period, products will be repaired or have parts replaced at our discretion provided that: (I) the product is returned to the agent from whom it was purchased; (II) the product has been purchased by an end user and has not used for commercial purposes; (III) the product has not been misused, handled carelessly, or used in a manner other than in accordance with the instructions provided describing its installation and proper use. This warranty does not confer rights other than those expressly set out above and does not cover any claims for consequential loss or damage. This warranty is offered as an extra benefit and does not affect your statutory rights as a consumer. This warranty is voided if the product comes in contact with aggressive UV additives or other improper liquids. EK blocks are sealed with warranty void circular label, which proves that the block has withstood a pressure leak test. Removing it will void leak-free guarantee and not the guarantee on the product itself. Any other RMA issues can be reported to support@ekwaterblocks.com for further analysis.

REQUIRED TOOLS AND MOUNTING SCREWS:



scissors



philips or torx T6 screwdriver